

₹ MOHS The first street of the first street of the first street of the first street street street of the first street str <u>200</u>




Fig. 2A

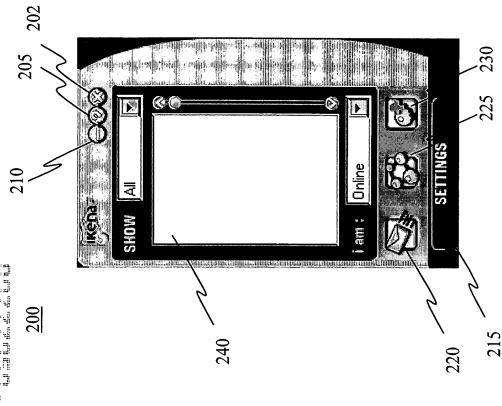


Fig. 2D

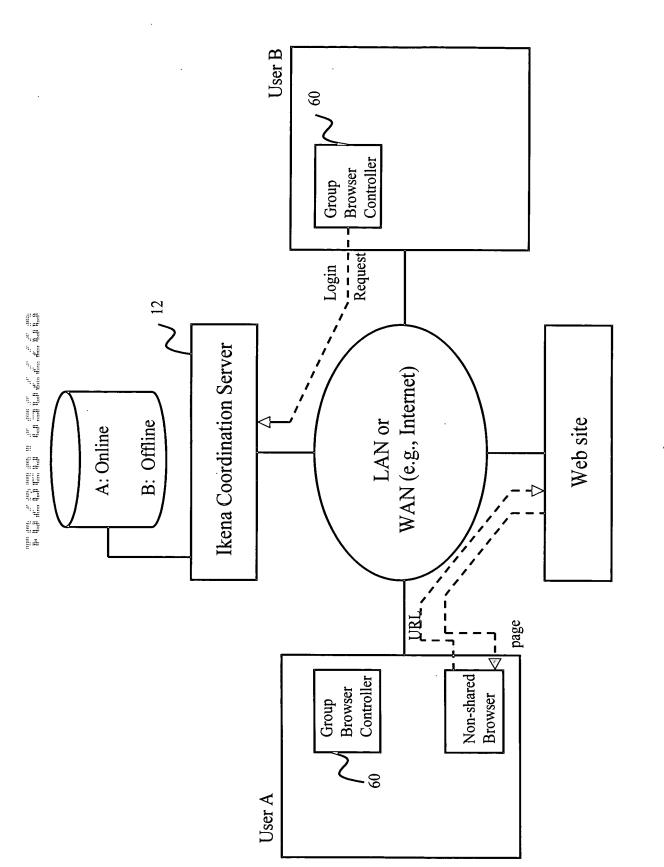


Fig. 2B

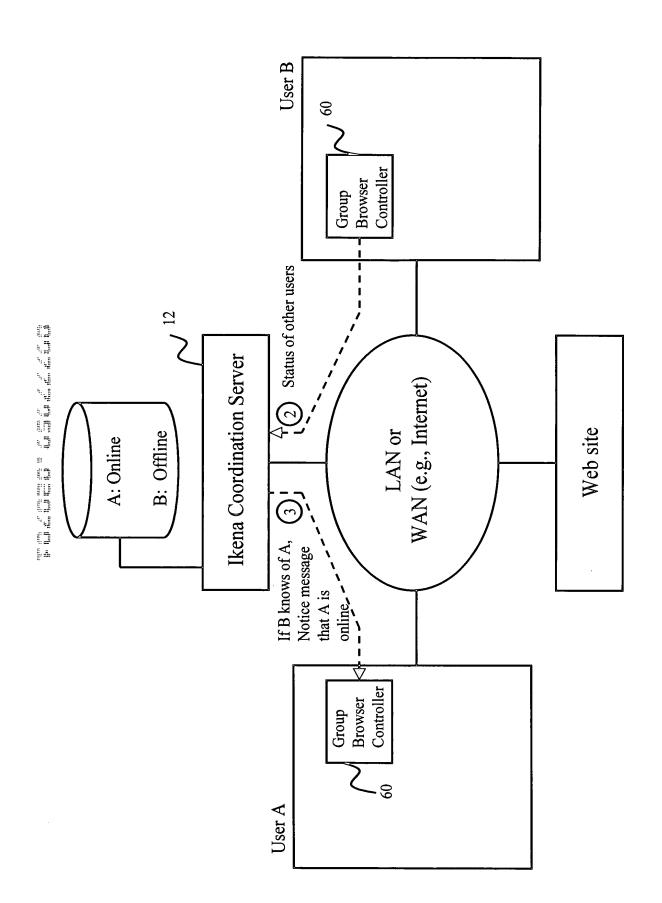


Fig. 2C

240

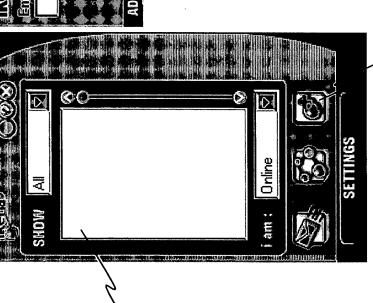


Fig. 3A

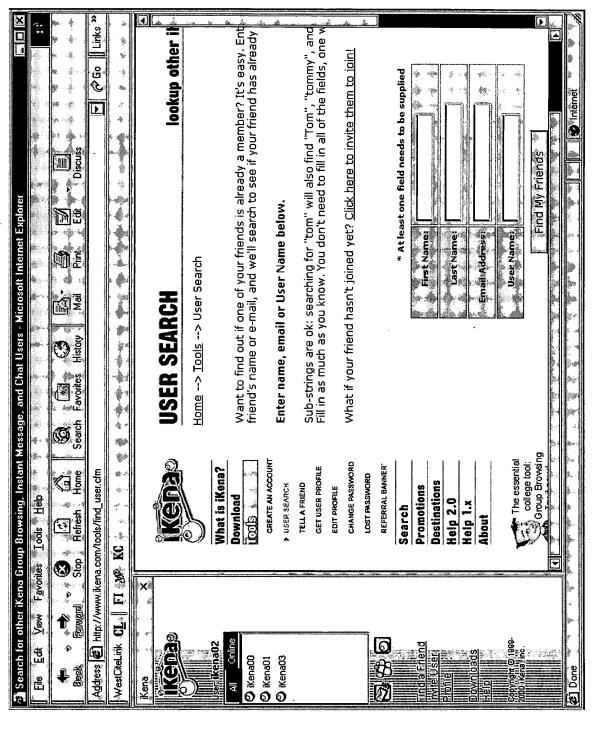



Fig. 3B

Ď

**(**()

Kena00

240

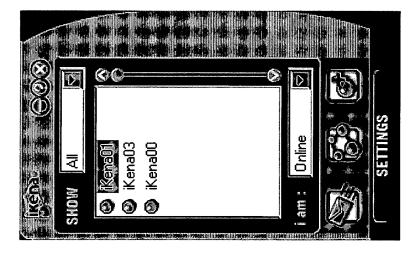

Online

i am ;

Fig. 4A

Fig. 4B

Sold E Command Sold E

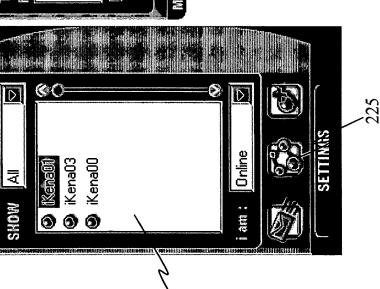


Fig. 5A

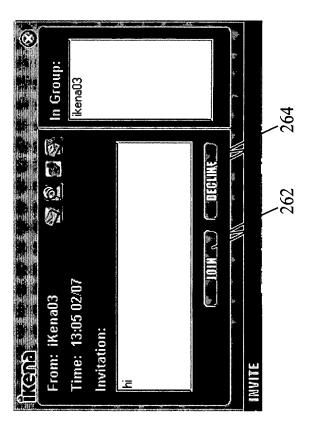


Fig. 5B

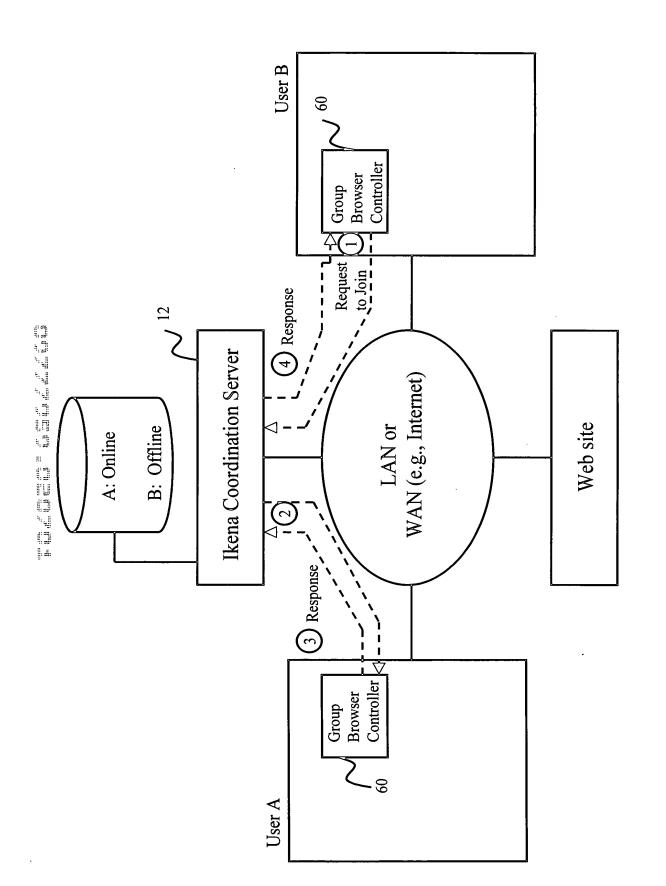


Fig. 5C

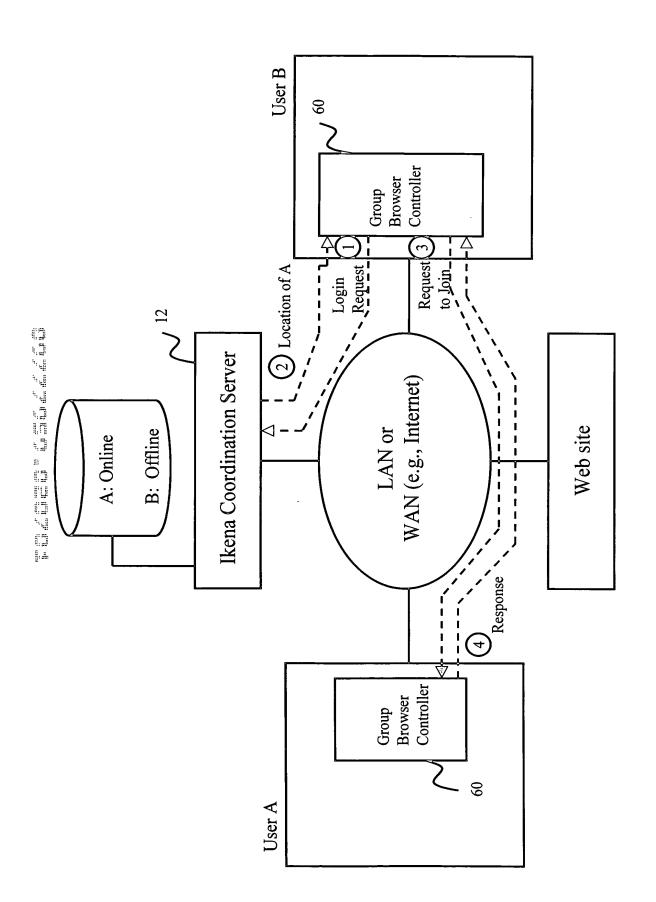
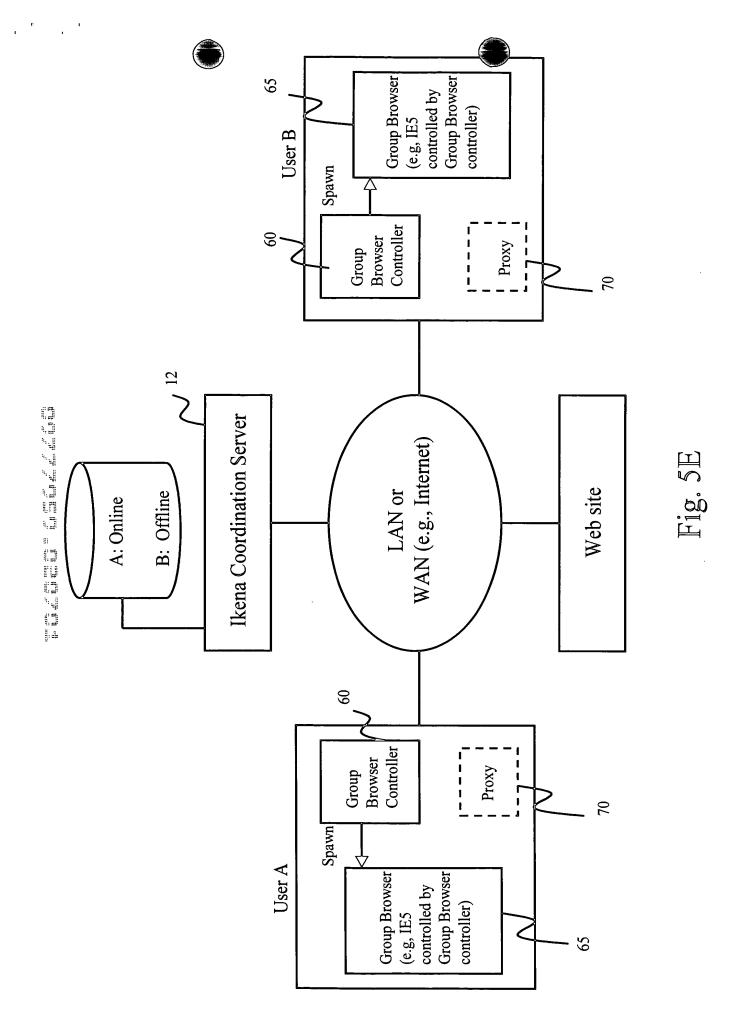
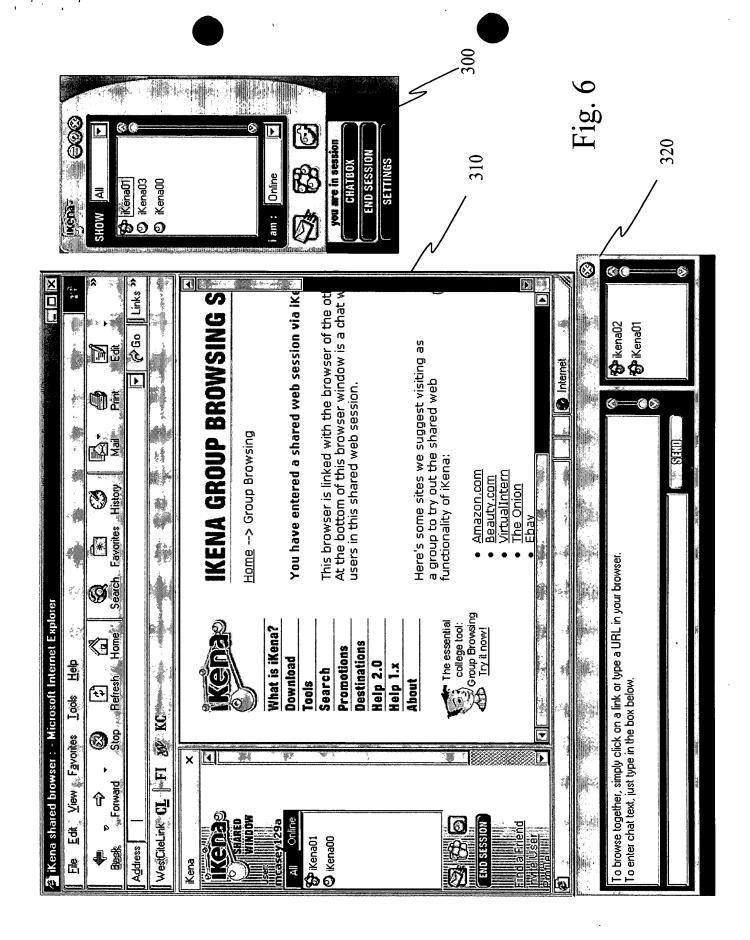


Fig. 5D





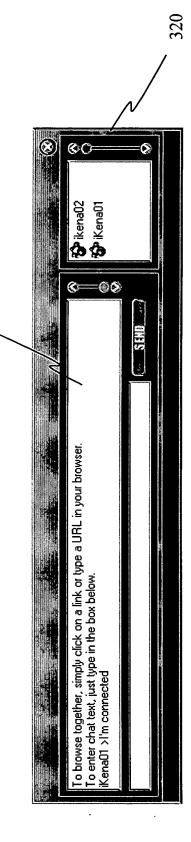


Fig. 7

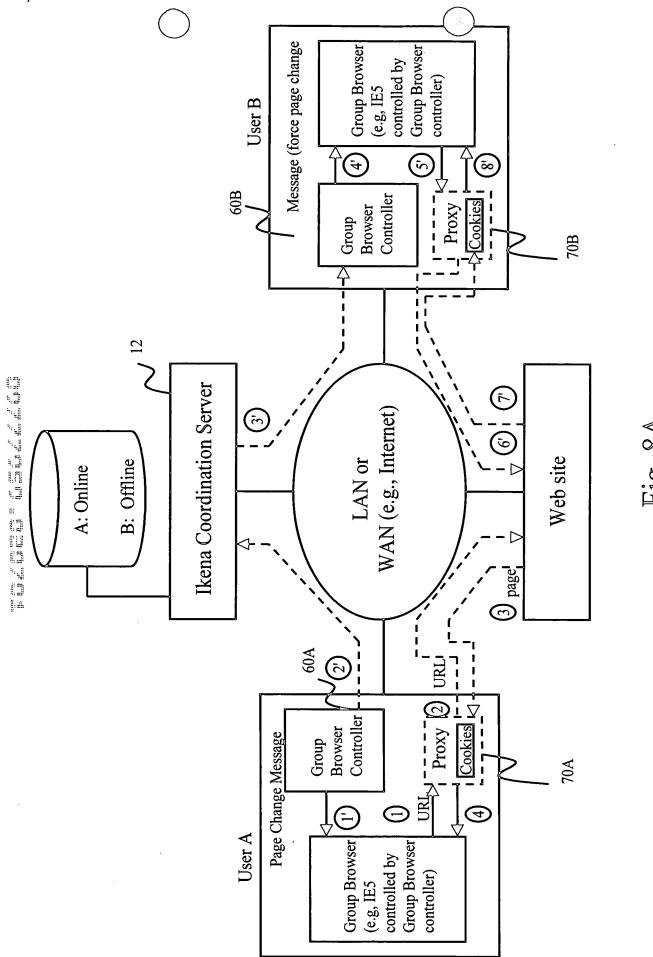
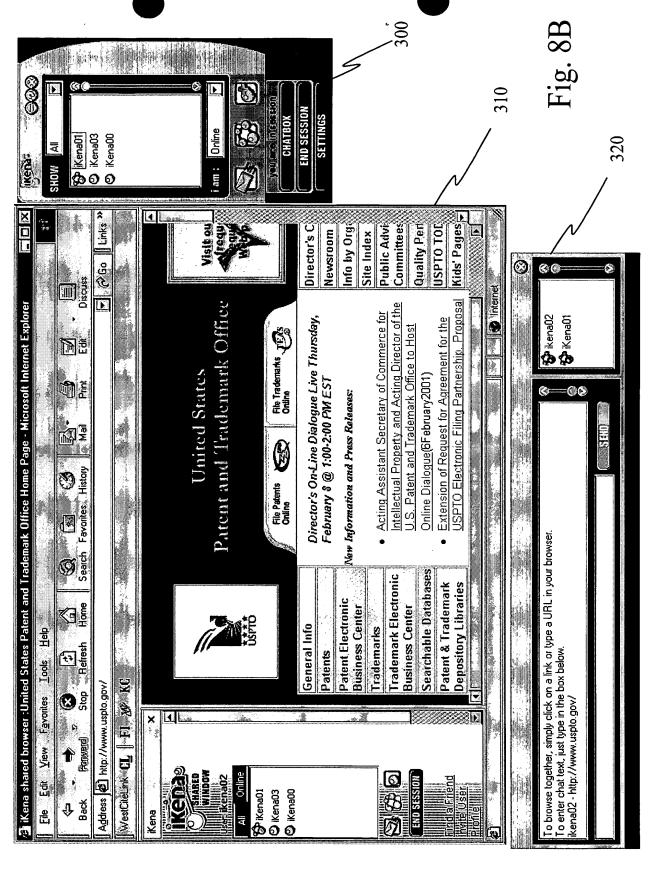


Fig. 8A







Fig.

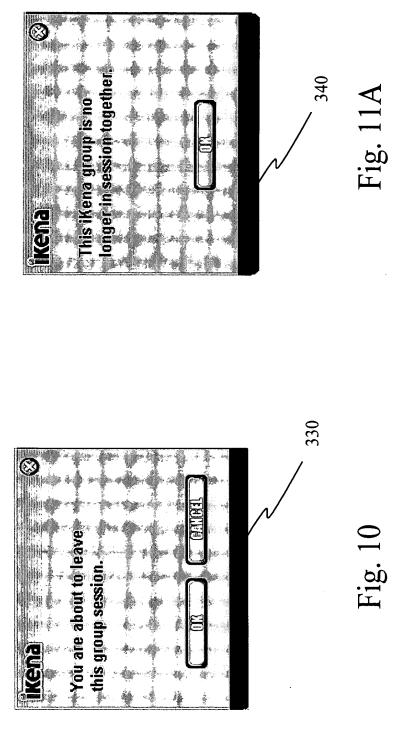

```
void stdcall CIkenaCobrowseHandler::on_terminate session( long
  session id, VARIANT BOOL b confirm )
   if( b_confirm != VARIANT FALSE )
     CIkenaConfirmDialog cnf dlg( IK INTER STRING(IDS SESSION TE
 RMINATE CONFIRM) );
     if( cnf dlg.DoModal( m hwnd parent ) == IDOK )
       if( m p ikena core != 0 )
         CComPtr<IIkenaPluginHost> p_plugin_host;
         m_p_ikena_core->get_plugin_host(&p_plugin_host);
         if ( p_plugin_host != 0 )
           m b confirm terminate = true;
           p plugin host->leave session( session id );
     }
   }
1,]
   else
1,71
     IKENANOTIFYHANDLER->show notify message( IK INTER STRING(ID
# S_SESSION_TERMINATE_NOTIFY) );
['U}
void stdcall CIkenaCobrowseHandler::on_session_terminate( long
\blacksquare session_id )
   if( m_p_chat_dlg )
   , m_p_chat_dlg->end(IDCANCEL);
     m p chat dlg = 0;
   if ( !m b confirm terminate )
     IKENANOTIFYHANDLER->show notify message modal (IDS SESSION
 TERMINATE NOTIFY );
     m b confirm terminate = false;
 }
```

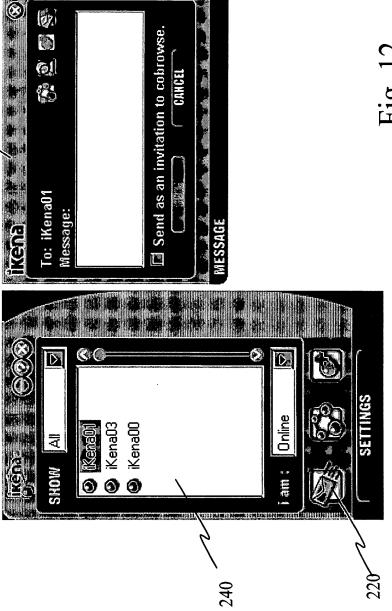


Fig. 12

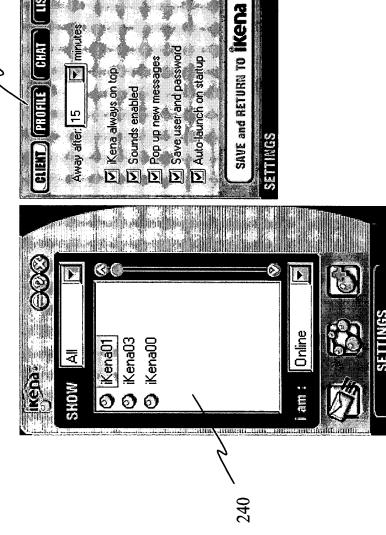


Fig. 13

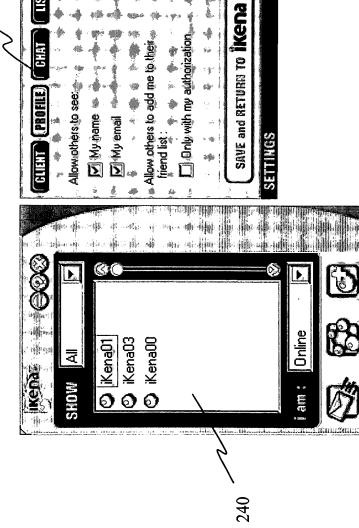


Fig. 14



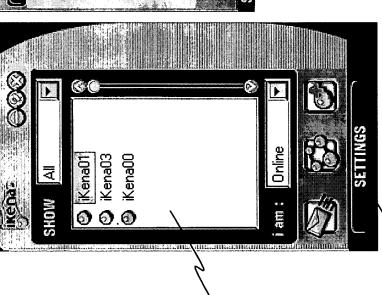



Fig. 15



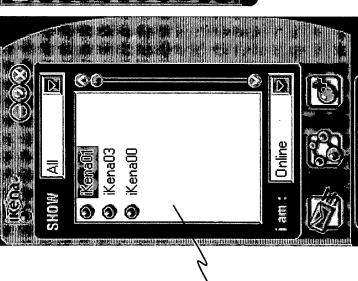


Fig. 16




Fig. 17

